


NOTES:

1. THIS DRAWING IS FOR ILLUSTRATION PURPOSES ONLY.
2. DIMENSIONS MUST BE VERIFIED IN SITU BEFORE CONSTRUCTION IS INITIATED.
3. ALL MEASUREMENTS ARE IN INCHES UNLESS OTHER MENTIONED.
4. ALL STRUCTURAL STEEL OBJECTS MUST BE COVERED WITH SPECIAL STEEL PAINT OXIDE RETARDER.
5. RESIDENT ENGINEER IS RESPONSIBLE FOR ENSURING COMPLIANCE OF ALL CODES MENTIONED TO GUARANTEE PRODUCT QUALITY.
6. IT'S THE CONTRACTOR RESPONSIBILITY TO BECOME FAMILIAR WITH THE PERMIT AND INSPECTION REQUIREMENTS SPECIFIED BY THE VARIOUS GOVERNMENTAL AGENCIES AND THE ENGINEER.
7. CONCRETE STRENGTH 32 MPA
8. STEEL STRENGTH 60 KSI
9. ADDING A RAPID SETTING ADDITIVE IS RECOMMENDED FOR COLD ZONES.
10. STEEL BOLTS AND FASTENERS SIZE AND LENGTH MUST BE DESIGNED FOR SHEAR, PUNCH AND BRACING.
11. MAIN REBAR AND STIRRUPS SIZE AND LENGTH MUST BE DESIGNED UNDER ACI 318-2014 PROCEDURE.
12. MINIMUM LENGTH OF REBAR BENDING IS #25.
13. CLEAR COVER OF CONCRETE IS 3" OR 7.50cm UNDER ACI 318-2014.
14. PLATE AND BOLT DETAIL IS ILLUSTRATIVE BY KONEX SUPPLIERS.
15. PIPE DIRECTION IS TO BE LOCATED TOWARDS ELECTRICAL PANEL.

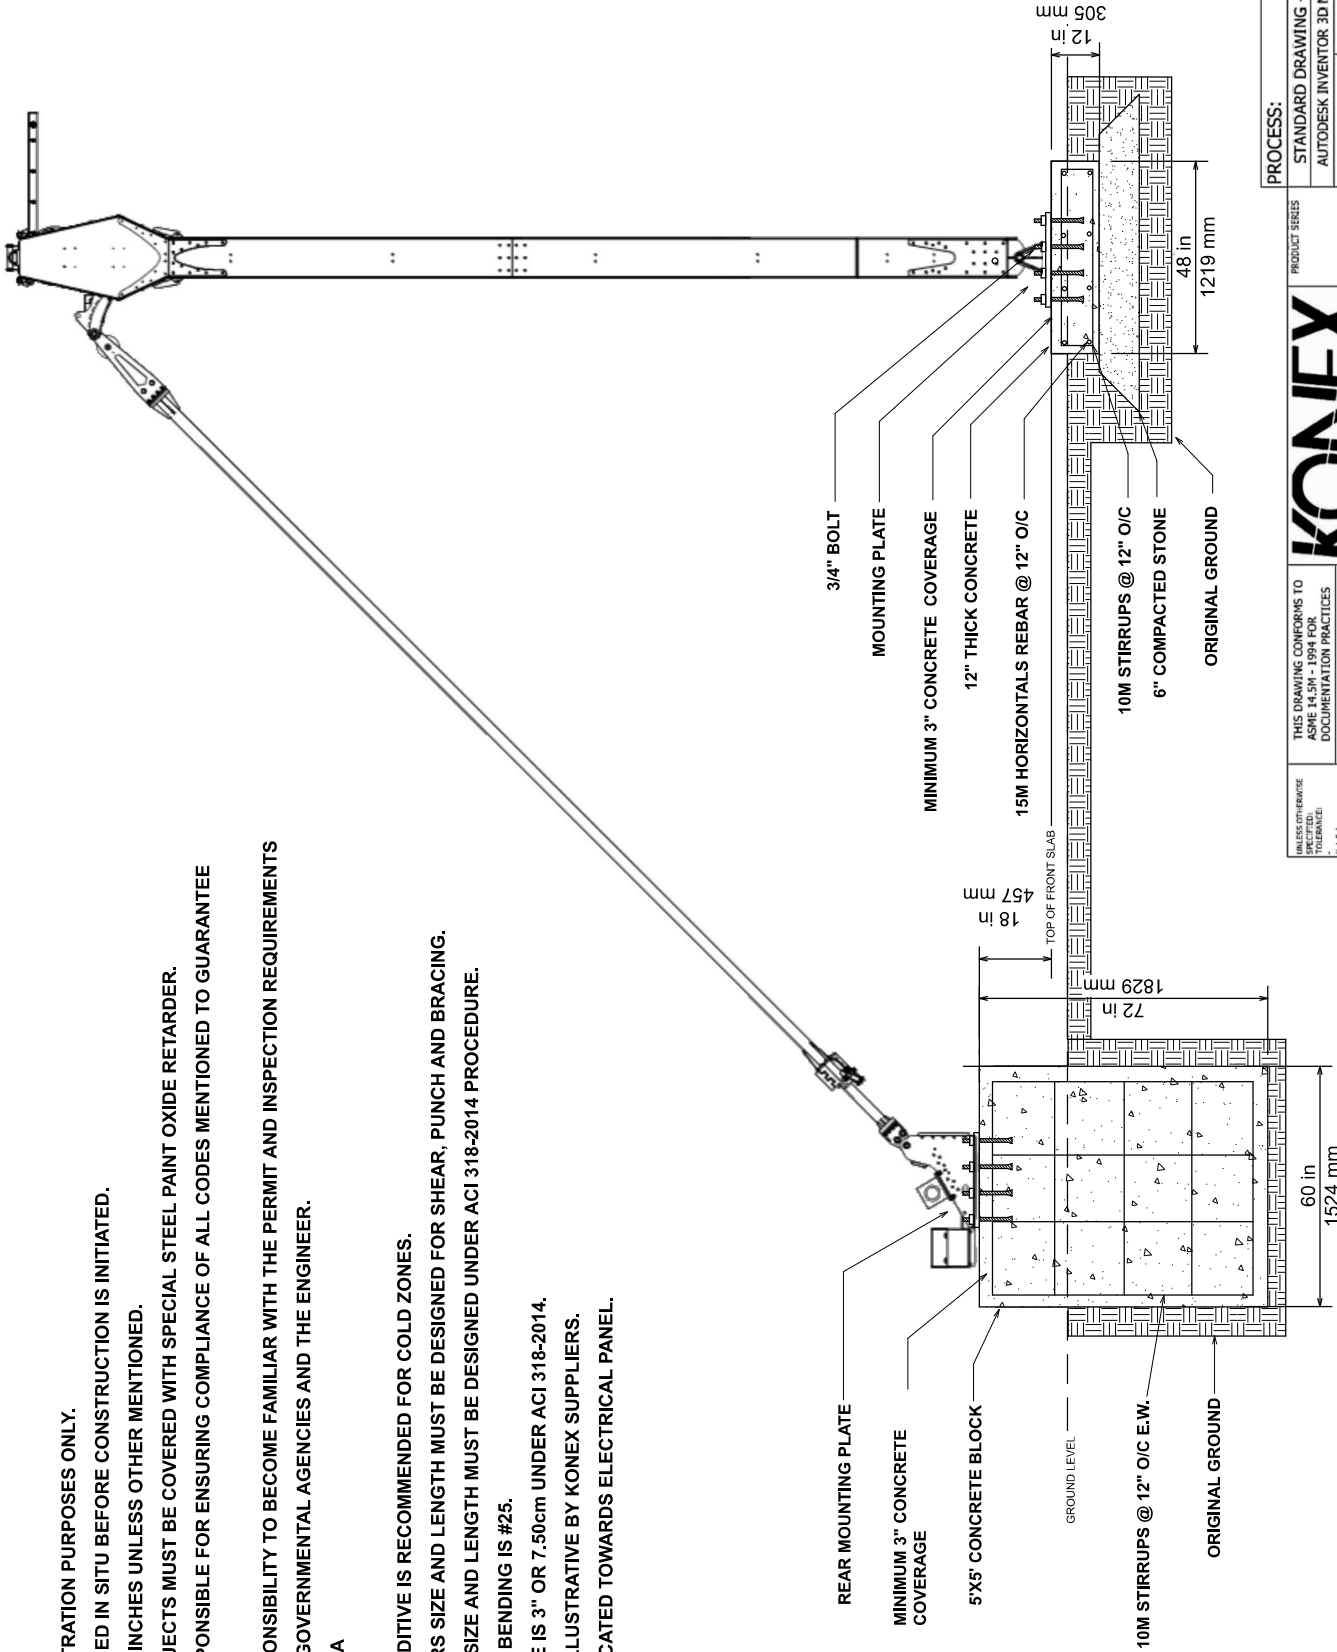

MAIN CROSS SECTION:

SCALE : 1/4"=1'
TOP DOWN VIEW

UNLESS OTHERWISE NOTED: K&E 0.1 K&E 0.01 K&E 0.001 FORMED ANGLE 4.0.5 DO NOT SCALE PRINT	THIS DRAWING CONFORMS TO ASME Y14.3M - 2014 FOR DOCUMENTATION PRACTICES THIRD ANGLE PROJECTION	PRODUCT SERIES	STANDARD DRAWING - IN
		KONEX KONEX CONSTRUCTION INC.	AUTODESK INVENTOR 3D MODEL
MATERIAL	TYPICAL BLOCK AND SLAB FOUNDATION	DRAWN BY	NAME
SHEET SIZE	MASS	DESIGNER	DATE
THICKNESS	SCALE	CHECKER	
		PART NO.	REV
			A
			SHEET NO. 2 OF 2

PROCESS: